


R-22 AC Retrofit Metrics

Capacity (%)		COP (%)		Mass Flow (%)		Discharge P (psi)		Suction P (psi)		Discharge T (°F)	
+10	+10	+10	+10	+40	+40	+25	+25	+25	+25	+25	+25
+6	+6	+6	+6	+24	+24	+15	+15	+15	+15	+15	+15
+2	+2	+2	+2	+8	+8	+5	+5	+5	+5	+5	+5
0	0	0	0	0	0	0	0	0	0	0	0
-2	-2	-2	-2	-8	-8	-5	-5	-5	-5	-5	-5
-6	-6	-6	-6	-24	-24	-15	-15	-15	-15	-15	-15
-10	-10	-10	-10	-40	-40	-25	-25	-25	-25	-25	-25
Capacity (%)		COP (%)		Mass Flow (%)		Discharge P (psi)		Suction P (psi)		Discharge T (°F)	

* Standard Cycle 105°F Condenser, 45°F Evaporator, 10°F Subcooling & 10°F Superheat

Mass Flow of R-22 AC Retrofits

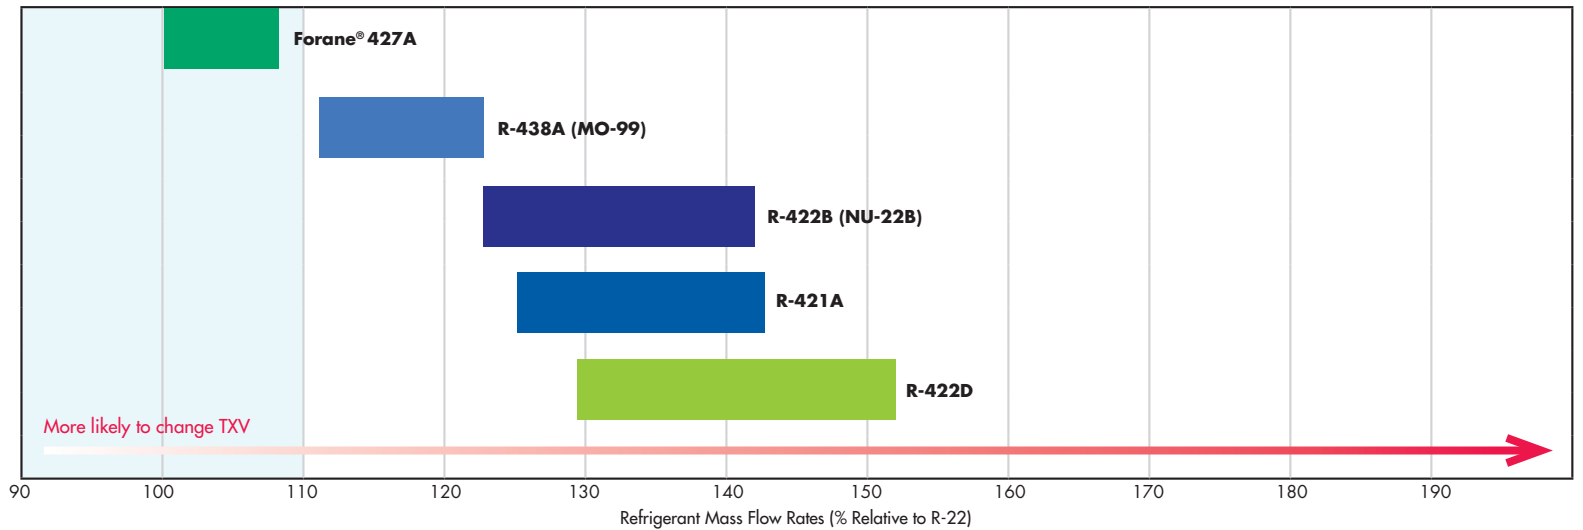

Please consult Arkema's disclaimer regarding the use of Arkema's products on <http://www.arkema.com/en/products/product-safety/disclaimer/index.html>

Forane® is a registered trademark of Arkema
© 2016 Arkema Inc. All rights reserved

Customer Service: 800-245-5858
www.forane.com



www.r22retrofits.com



Arkema Inc.
900 First Avenue
King of Prussia, PA 19406
USA
Tel.: (+1) 610-205-7000

Headquarters: Arkema France
420, rue d'Estienne d'Orves
92705 Colombes Cedex - France
Tel.: +33 (0)1 49 00 80 80
Fax: +33 (0)1 49 00 83 96
arkema.com